


## MANURE VALVES

FERROCAST<sup>®</sup> cast iron · for export

· upon request: take care of AwSV-specification

## SPARE PARTS MANURE VALVES

			Ref. No.	Opening	kg ca.
QUICK SNAP VALVE	PIONIER		S - 60 DN200*	200 mm	41,0
			S - 60 DN250*	250 mm	48,0
		P	S - 60 DN300	300 mm	66,0
			<ul> <li>to be connected with PVC pipe</li> <li>collar coupling both sided</li> <li>Push rod out of Stainless steel / Handle galvanized steel</li> </ul>		:
SPINDLE VALVE	PRIMO	L	Ref. No.	Opening	kg ca.
SI INDLE VALVE			S - 61 DN150*	150 mm	30,0
			S - 61 DN200*	200 mm	44,0
			S - 61 DN250*	250 mm	46,0
			S - 61 DN300	300 mm	64,0
		and the second sec	5 - 01 DN500	500 mm	04,0
			to be connected with PVC-pipe		
		<ul> <li>collar coupling both sided</li> </ul>			
			<ul> <li>Spindle out of</li> </ul>		
HAND-PULLING VALVE	OVATION*		Ref. No.	Opening	kg ca.
	• • • • • • • • • • • • • • • • • • • •		S - 62 DN300*	300 mm	34,0
			<ul> <li>to be connecte</li> <li>for insertion of</li> <li>Push rod out o</li> </ul>	FKG pipe	
HAND VALVE	OPTIMA*		Ref. No.	Opening	kg ca.
			<ul> <li>for KG pipe col</li> </ul>	lar coupling	
			S - 63 DN125*	125 mm	11,0
			S - 63 DN150*	150 mm	12,0
			S - 63 DN200*	200 mm	21,0
	•	In Internet	<ul> <li>for insertion of KG pipe</li> </ul>		
		apprent,	S - 63 DN250*	250 mm	20.0
			S - 63 DN250* S - 63 DN300*		29,0
			S - 63 DN300" S - 63 DN400*	300 mm 400 mm	38,0 58,0
		1			
			<ul> <li>to be connected</li> </ul>	d with PVC pipe	
FLANGE HAND VALVE	FORMAT*		Ref. No.	Opening	kg ca.
I LANUL HAND VALVE					
			S - 64 DN125*	125 mm	11,0
			S - 64 DN150*	150 mm	12,0
			S - 64 DN200*	200 mm	21,0
		A series of	<ul><li>to be connecte</li><li>collar coupling</li></ul>		flange connection

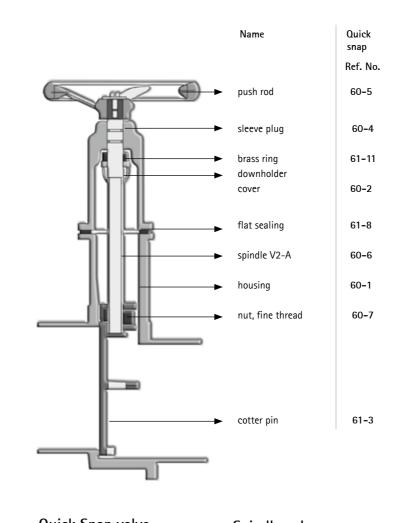

Quick Snap	Quick Snap valve		Spindle valve		
Ref. No	Name	Ref. No	Name		
60-1	housing	61-1	housing		
60-2	cover	61-2	cover		
60-6	push rod	61-6	push rod		
61-3	cotter pin	61-3	cotter pin		
60-4	sleeve plug	61-4	downholder		
60-7	nut, fine thread	61-7	nut, trapeziodal thre		
61-11	brass ring	61-11	brass ring		
61-8	flat sealing	61-8	flat sealing		
60-5	handle	61-5	hand wheel		
S-60-E-1	mini-spare-part set	S-61-E-1	mini-spare-part se		
S-60-E-2	maxi-spare-part set	S-61-E-2	maxi-spare-part se		
S-60DN300-A	replacement set*	S-61DN300-A	replacement set*		
* complete valve	without housing				



housing

cover

\* On request. Discontinued types.

Please note technical advices and instructions for valves at www.schonlau-stalltechnik.de



Spindle		1.4			
valv		A -			
	No.				
61	-5	ри	push rod		
	-11				
61-4 61-2			~		
01-2		wheel			
61-8		1			
61-6					
61-1		spindle	push rod		
61-7		Spinare   push rou			
61	-3	C	otter		
		slee	ve plug		
	ca. kg				
	34,0				
	11,0				
	2,0 11,0	dowr	holder		
	0,3				
read	0,1				
		9			
	4,0				
set set	2,0 3,0	nut	nut		
*	26,0	fine thread	trapeziodal thread		
		a 🦲 da			
		brass ring	splint		
VA					
5	14				
		flat sealing			
			, in the second s		